

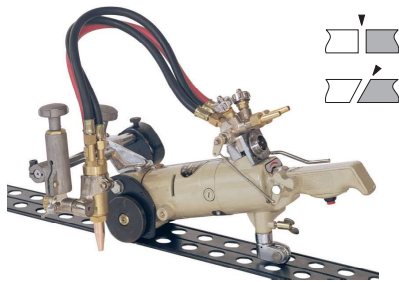


## Portable Gas Cutting Machine

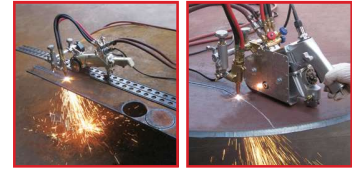


### HK-30 Portable Gas Cutting Machine

- ◀ The main body is made of aluminum of aluminum alloy, produced precisely by die-casting.
- ◀ The speed is adjusted by controlled silicon unit.
- ◀ The hoses of oxygen and acetylene are imported from advanced company abroad.
- ◀ The high-speed switch is affixed to the assembly of hose, to raise its efficiency.
- ◀ Mainly for straight cutting and also for circular cutting of the circumference >Φ200mm.
- ◀ Single torch cutting, bevel angle: 1.V(45°)
- ◀ Application in shipbuilding, boiler, chemical and metal industry, etc.

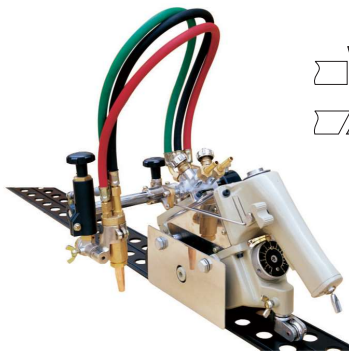


### HK-30A Portable Gas Cutting Machine

- ◀ The main body is made of high strength alloy aluminum by die-casting.
- ◀ Beautiful appearance, compact structure, moving fast and freely;
- ◀ The speed system is adjusted by rheostat, moving steadily;
- ◀ Oxygen cutting with quick switch, operating easy;
- ◀ All controlling by one hand to cut different shape such as angle and arc circle etc. and good at swerving;
- ◀ Selecting different attachment can be for beeline, slope 1.V(45°), circle and arc cutting;
- ◀ Suitable for ship building, oil, chemical, and metal structure factory, etc;



### HK-93 Portable Gas Cutting Machine

- ◀ The main body is made of aluminum alloy, produced precisely by die-casting;
- ◀ It looks beautiful and compact, move easy and quick;
- ◀ The hoses of oxygen attached with quick switch;
- ◀ Operation can be done by single hand, to cut for different shape,
- ◀ Such as side corner and curve, and also for swerve cutting;
- ◀ For straight cutting and also for bevel cutting of 1.V(45°), circle and curve cutting;
- ◀ Application in shipbuilding, boiler, chemical and metal industry, etc.



### HK-93-II Head-face Profiling Cutting Machine

- ◀ This machine has two sets of touches that can bevel X-shape at the end of the plate (both sides) at the same time, form in a single pass.
- ◀ The machine is with swiftness of motion and flexibility of operation.
- ◀ This machine is equipped with gas pre-set switch so as to avoid readjusting when cutting
- ◀ At the bottom and two sides of the machine is equipped with the thermal baffle so as to prevent the machine from the heating radiation. This consequently provides the stable walking and high quality in beveling X-shape.

**Beveling angle: 0°-45° Bevel width: 50mm**

Order NO.	Model NO.	L×W×H (mm)	Supply Voltage V/HZ	Cutting Thickness (mm)	Cutting Speed (mm/min)	Dia.of.Circle Cutting (mm)	Total Weight (kg)
HW1005	HK-30	455×400×225	AC220/50	6~30	50~750	Φ50~Φ550	9.8
HW1007	HK-30A	460×360×240	AC220/50	6~30	50~1000	Φ50~Φ550	10.5
HW1053	HK-93	420×295×250	AC220/50	6~30	50~1000	Φ50~Φ550	8.2
HW1054	HK-93-II	465×400×365	AC220/50	6~30	100~1000	/	16.5